

020-0750
Flush Mount Pull Handle -
Locked Rigid



This flush mount pull handle was specifically designed for compartment and entrance doors for off-highway vehicles. It offers ergonomic function and styling, is adaptable for power door lock actuation and has a "locked-rigid" handle when locked. The design provides for ease of operation by keying alike with other TriMark products with the KeyOne™ Plus lock.

DESIGNED FOR:

- Light to medium agricultural and construction personnel and compartment doors



TriMark Corporation

500 Bailey Avenue
P.O. Box 350
New Hampton, Iowa 50659
United States
Tel: 641-394-3188
Fax: 641-394-2392
1-800-447-0343
www.trimarkcorp.com



TriMark Europe

Cedar Court
Walker Road
Bardon Hill
Coalville LE67 1TU
United Kingdom
Tel: +55 (0)1530 512460
Fax: +44(0)1530 512461
www.trimarkeu.com





020-0750 Flush Mount Pull Handle - Locked Rigid

FEATURES/BENEFITS:

- Ergonomic function and styling
- KeyOne™ Plus lock cylinder can be keyed alike with most single and reversible key systems
- Paddle is "locked rigid" when locked
- Adaptable for power door lock actuator
- Housing flange and internal gaskets provided for resistance to water and dirt infiltration



FINISH:

- Black housing, black nylon handle
- Zinc plated clear chromate steel components

INSTALLATION:

- Easy mounting with (2) M6 nuts
- Recommended mounting fastener torque 30-40 in-lbs (3.3 - 4.4 N-m)
- Either horizontal or vertical orientation
- Non-handed standard mounting bracket (sold separately)

AVAILABLE:

- Right and left hand configuration
- Can be keyed alike with most single and reversible key systems
- Locking version


MATERIAL:

- Housing: glass reinforced black nylon, brass threaded mounting studs
- Handle: glass reinforced black nylon
- Pivot plate: mild steel

NOTE: Product does not meet the locking requirements for FMVSS 206

U.S. Patent No. 6,802,544 and 6,805,388
Design Patent No. D489,957

Individual part dimensions are for reference only. Refer to individual part drawings for complete dimensions, specifications, and installation procedures. Engineering assistance and application drawings are available.

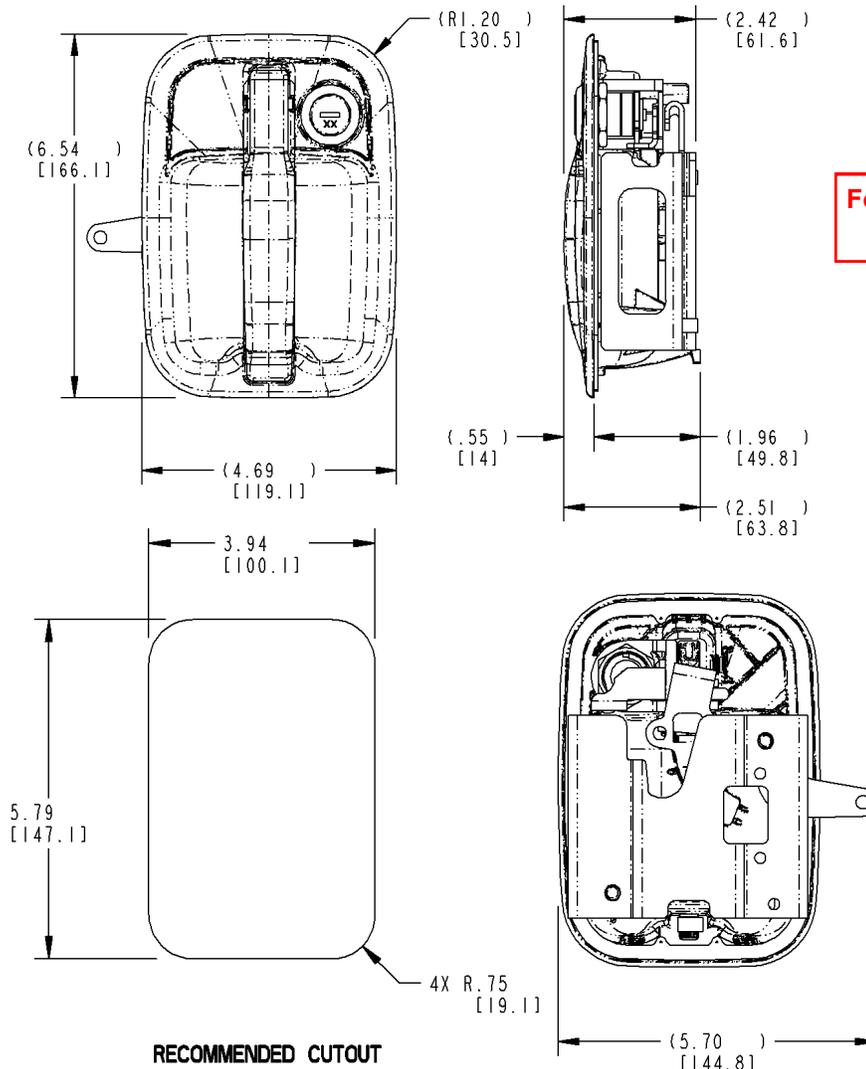

For more information visit
www.trimarkcorp.com