

020-0870

Power Locking Pull Handle With Capacitive Sensor—PKE



TriMark's new 020-0870 e-LOCKING Pull Handle for off-road applications, allows use with TriMark's Gen 3 e-ASK Passive Keyless Entry System featuring integrated capacitive sensor, PKE circuit board and power lock/unlocking motor drive. Based on the proven 020-0850, this robust pull handle brings the latest automotive functionality and convenience to your cab enclosures.

DESIGNED FOR:

- Medium to heavy-duty agricultural and construction personnel doors
- Off-highway vehicle applications that require a direct release surface mounted exterior pull handle and "state of the art" Passive Keyless Entry



www.trimarkcorp.com

TriMark Corporation

500 Bailey Avenue

P.O. Box 350

New Hampton, Iowa 50659
United States

Tel: 641-394-3188

Fax: 641-394-2392

1-800-447-0343

www.trimarkcorp.com

10002707 QM08
10002707 TS09



ISO 9001: 2008
ISO/TS 16949: 2009

TriMark Corporation

TriMark Europe

Cedar Court

Walker Road

Bardon Hill

Coalville LE67 1TU

United Kingdom

Tel: +44(0)1530 512460

Fax: +44(0)1530 512461

www.trimarkeu.com

427961 QM08
427961 UM



ISO 9001 : 2008
ISO 14001 : 2004

TriMark Europe Ltd.




020-0870

Power Locking Pull Handle With Capacitive Sensor—PKE

FEATURES/BENEFITS:

- Extends the product range of TriMark 020-0850 e-LOCKING Pull Handle with an Integrated Capacitive Sensor and Passive Keyless Entry PCB board into the base. This minimizes footprint profile of handle to maximize visibility to the user.
- Passive Keyless Entry (PKE) provides for “hands free” unlocking
 - When the users hand enters the field under the handle portion, the system wakes up
 - This activity energizes the exterior antenna. FOBs in range will respond with their serial numbers contained in a data packet sent via 433 MHz
 - If the FOBs respond with serial numbers that match an authorized list, the control module will pulse the unlock motor for ½ second to unlock the handle

- Powerlock/unlock motor integrated into handle to reduce assembly and space needs of vehicle
- Maintains lock cylinder for mechanical override in case of power disruption
 - TriMark KeyOne™ Plus for “One Key — One Vehicle” convenience
- Readily adaptable to a variety of door thickness with adjustable connecting linkage assembly
- PTC overload protects motor against excessive heating
- Best in class features, flexibility and performance all in one package allowing fewer system configurations

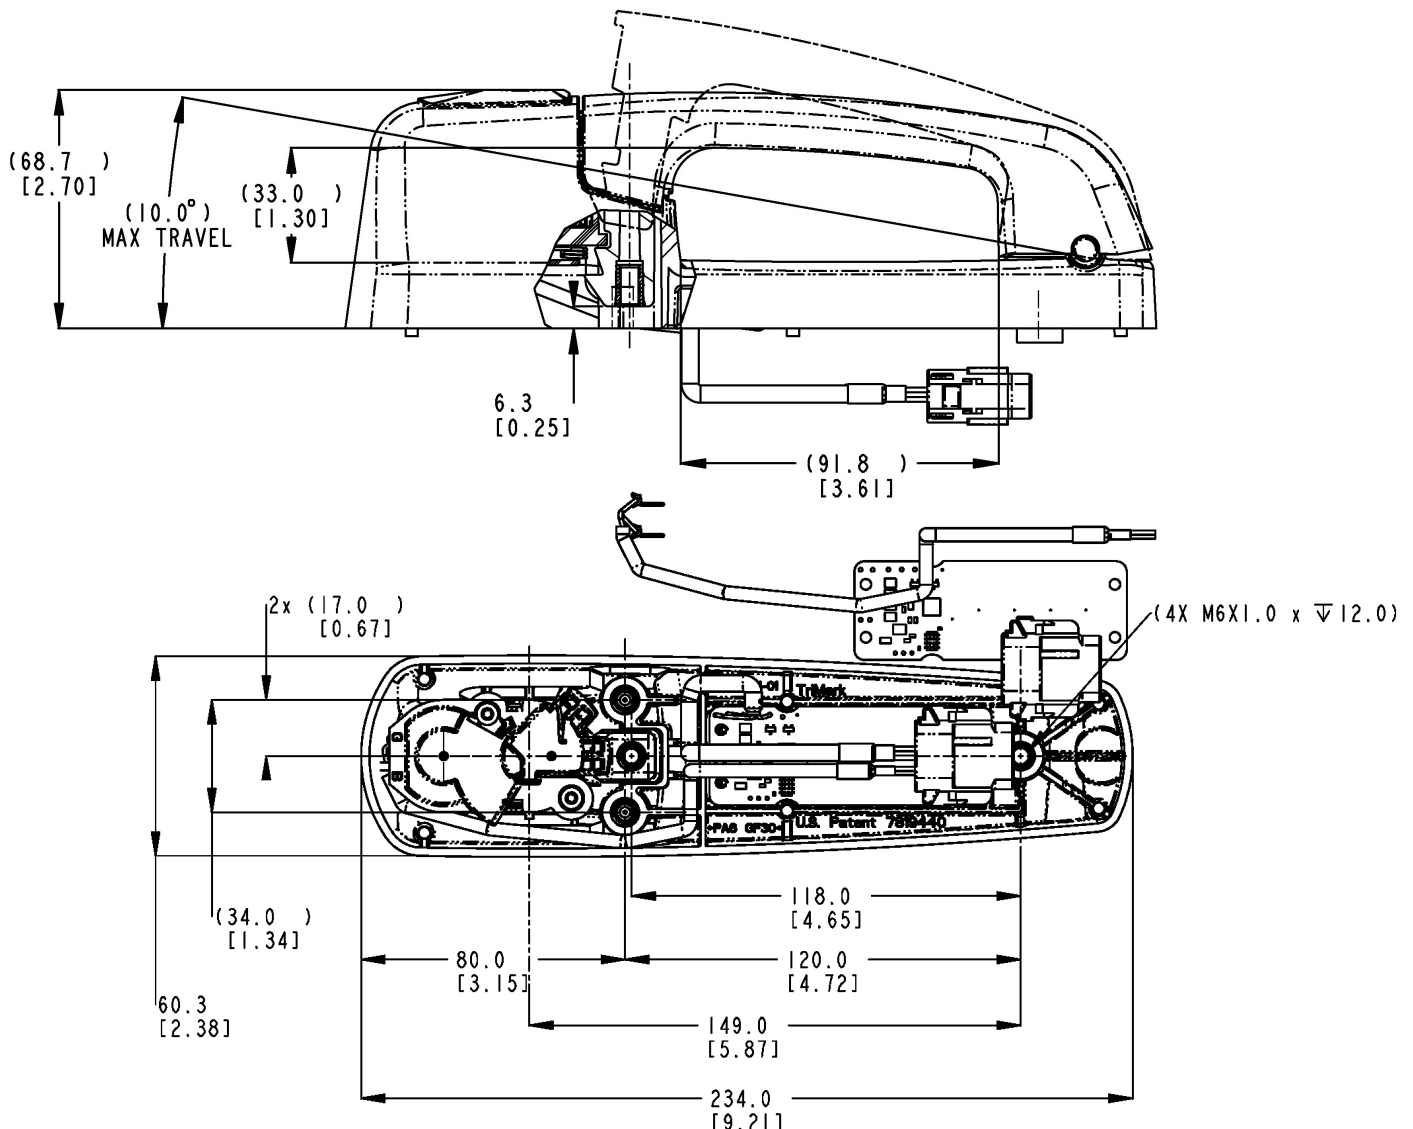



020-0870 Power Locking Pull Handle With Capacitive Sensor—PKE

AVAILABLE:

- With perimeter gasket and spacers to facilitate mounting and provide resistance to water and dirt infiltration
- Non-power locking version
- Standard Deutsch sealed connector —8 pin socket plug. (Connector customizations are available)

MATERIAL:

- Handle and base: Glass reinforced nylon
- Threaded inserts: Brass
- Potted (polyurethane resin) PCB board ensures environmental protection and durability

INSTALLATION:

- Same mounting pattern as 020-0800 and 020-0850 Pull Handles — mounts against glass with only 2 holes or steel with conventional mounting
- Installed with (3) M6 x 1.0 bolts (not included)
- Recommended mounting fastener torque to be 5.6-6.7 N-m (50-59 lbf-in)

U.S. Patent No. 7,819,440
Other Patents Pending

Caution: Product does not meet the locking requirements for FMVSS 206.

Individual part dimensions are for reference only. Refer to individual part drawings for complete dimensions, specifications, and installation procedures. Engineering assistance and application drawings are available.



RECOMMENDED GLASS MOUNTING
DOOR CUTOUT DETAIL

