

# 010-0200 Non-Locking L-Handle

# 010-0300 Locking L-Handle



### DESIGNED FOR:

- General purpose use for off-highway cab doors or storage, compartment and access doors for on or off-highway applications

### FEATURES/BENEFITS:

- Ample finger clearance
- Easily installed with oval or flat head No. 10 fasteners (not included)
- Locking L-handle assembly provides 360° rotation and locks at 90° increments



500 Bailey Avenue  
P.O. Box 350  
New Hampton, Iowa 50659  
United States  
Tel: 641-394-3188  
Fax: 641-394-2392  
1-800-447-0343  
www.trimarkcorp.com



### TriMark Europe, Ltd.

Cedar Court  
Walker Road  
Bardon Hill  
Coalville LE67 1TU  
United Kingdom  
Tel: +44 (0)1530 512460  
Fax: +44 (0)1530 512461  
www.trimarkeu.com



# 010-0200 Non-Locking L-Handle

# 010-0300 Locking L-Handle

### AVAILABLE:



- Mounting hole patterns and escutcheons (bases) for different finger clearances
- Drive bar lengths, with or without holes or threaded rods
- Keyed CH751 and other key codes
- Drive bar attached to handle by drilling and pinning
- Locking or non-locking:
  - ◇ Standard finger clearance (Type 1 and 2)
  - ◇ Extended finger clearance (Type 4)
  - ◇ Low profile (Type 3)
- 1.50 or 1.75 mounting hole spacing

### USE WITH:



- Please refer to our website for related products that are compatible for use with this product

For more information visit  
[www.trimarkcorp.com](http://www.trimarkcorp.com)

### Standard Finger Clearance (Type 1)

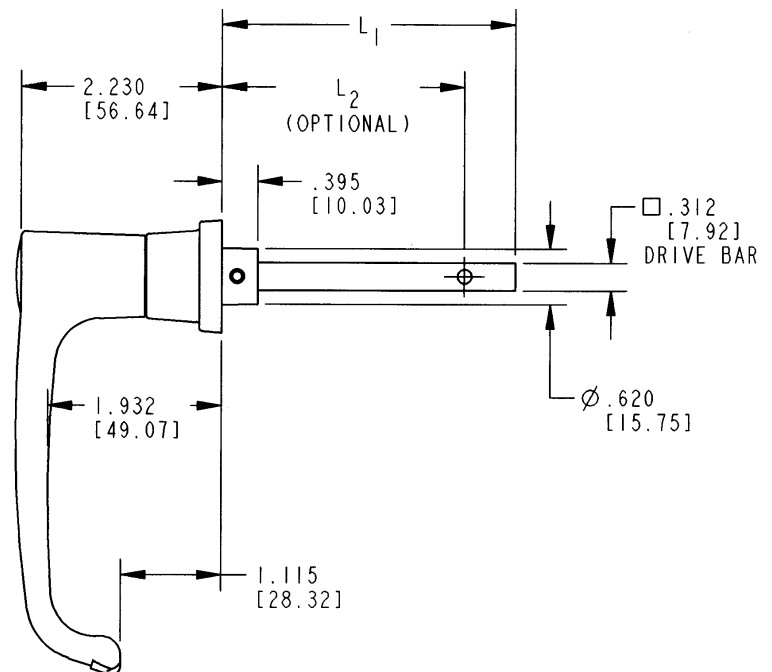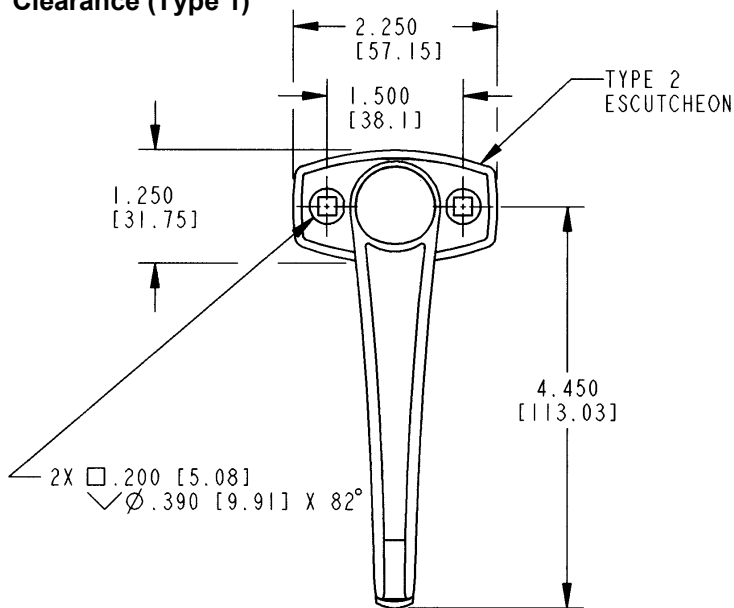

### Standard Finger Clearance (Type 2)

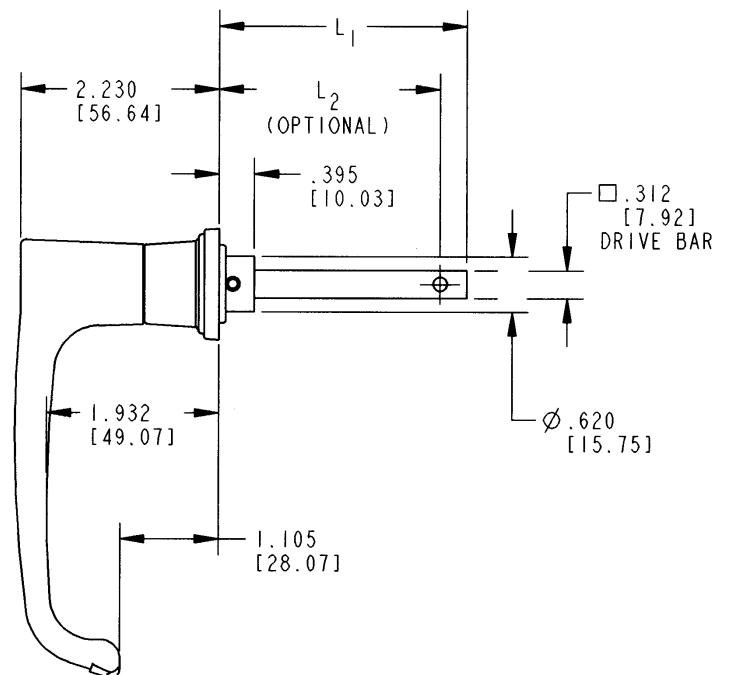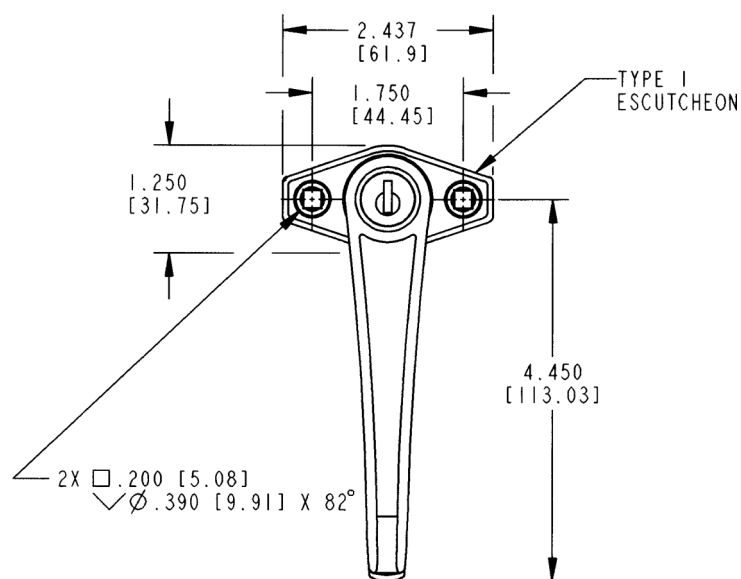

**SPECIFY WHEN ORDERING:**

- Series number
- Escutcheon type
- Drive bar length (L1) and optional hole location (L2)

**FINISH:**


- Handle and escutcheon: copper-nickel chrome plated; or black powder coated
- Drive bar: mill finish

**MATERIAL:**


- Handle and escutcheon: die cast zinc alloy
- Drive bar: mild steel

Individual part dimensions are for reference only. Refer to individual part drawings for complete dimensions, specifications, and installation procedures. Engineering assistance and application drawings are available.

**Low Profile (Type 3)**

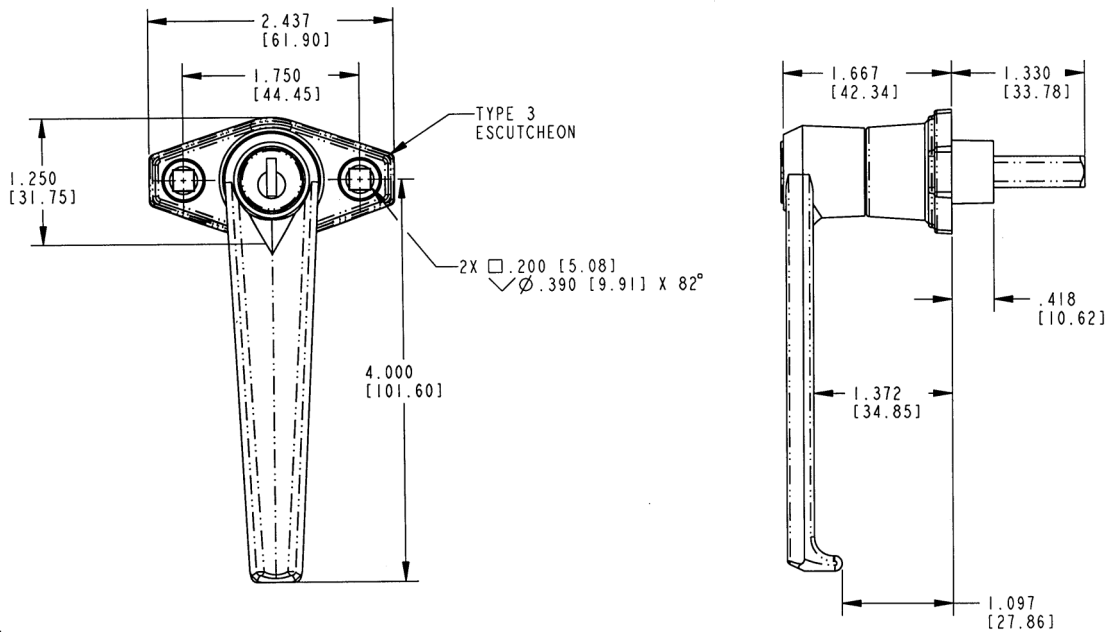

**Extra Finger Clearance (Type 4)**

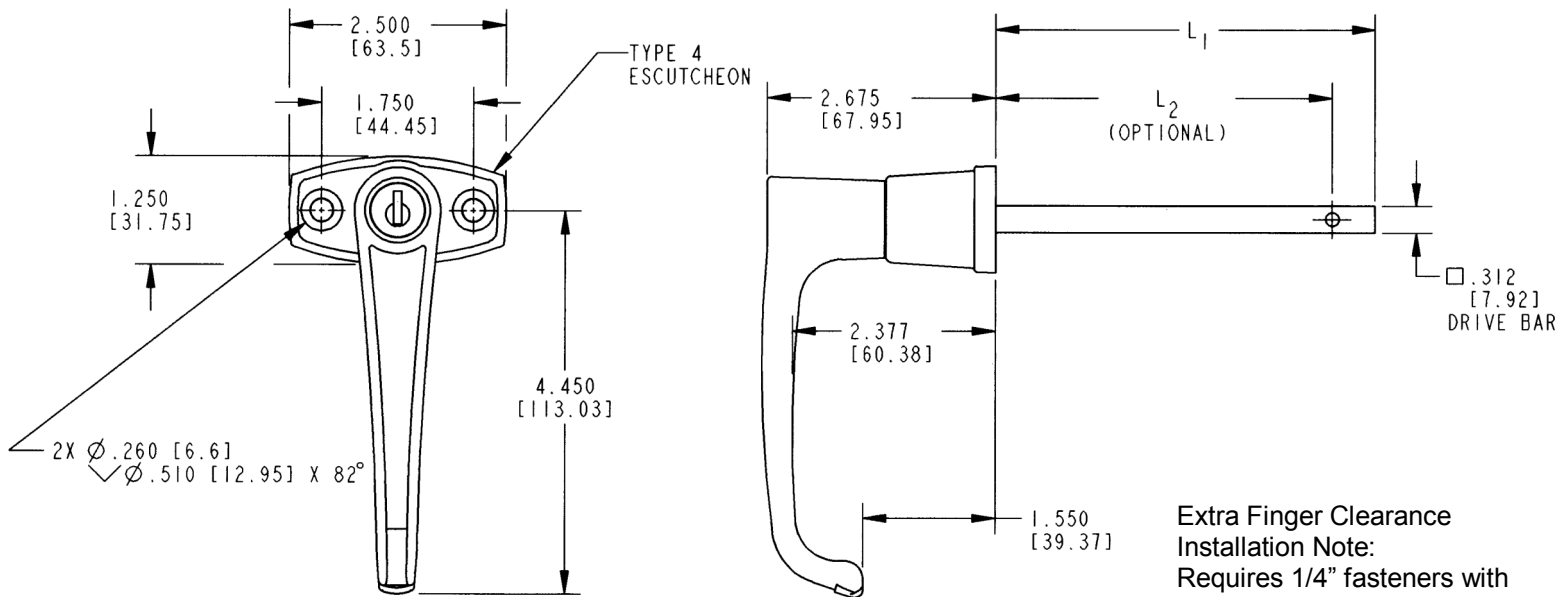

**Extra Finger Clearance  
Installation Note:**  
Requires 1/4" fasteners with  
oval or flat head (not included)