

020-1100  
Remote Pull Handle  
020-1150 2-Point  
Free-Float Pull Handle



This new product is designed for entrance doors on RV and specialty vehicles where it is desirable to have the exterior handle remotely mounted from the inside release and rotary latch. It features a large automotive styled exterior pull handle and is adaptable for power locking.

- Entrance and compartment doors with thickness of 2" (50.8mm) minimum

**FEATURES/BENEFITS:**

- Automotive style pull handle and latch mechanism
- Smooth opening/closing action
- Comfortable finger access
- Adaptable for power door lock actuation
- Non-handed design
- The pull handle can also be mounted in vertical or horizontal orientation
- Molded gasket for flange of housing and paddle leg provides resistance to water infiltration



**TriMark Corporation**

500 Bailey Avenue  
P.O. Box 350  
New Hampton, Iowa 50659  
United States  
Tel: 641-394-3188  
Fax: 641-394-2392  
1-800-447-0343  
www.trimarkcorp.com



**TriMark Europe**

Cedar Court  
Walker road  
Bardon Hill  
Coalville LE67 1TU  
United Kingdom  
Tel: +55 (0)1530 512460  
Fax: +44(0)1530 512461  
www.trimarkeu.com



**AVAILABLE:**

- Master keyed lock key cylinder
- Lock can be keyed to match other TriMark door products with KeyOne™ Plus for a single-key system, keyed alike or provided non-locking





**INSTALLATION:**


- Easy to install with 4 - #8-32 UNC mounting screws (not included)
- Recommended mounting torque 30 in/lbs (3.4 N-m)

**MATERIAL:**

- Sturdy die cast zinc alloy paddle and housing
- Molded gaskets (included)

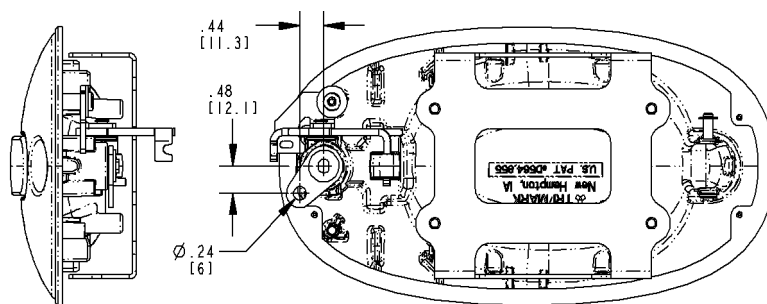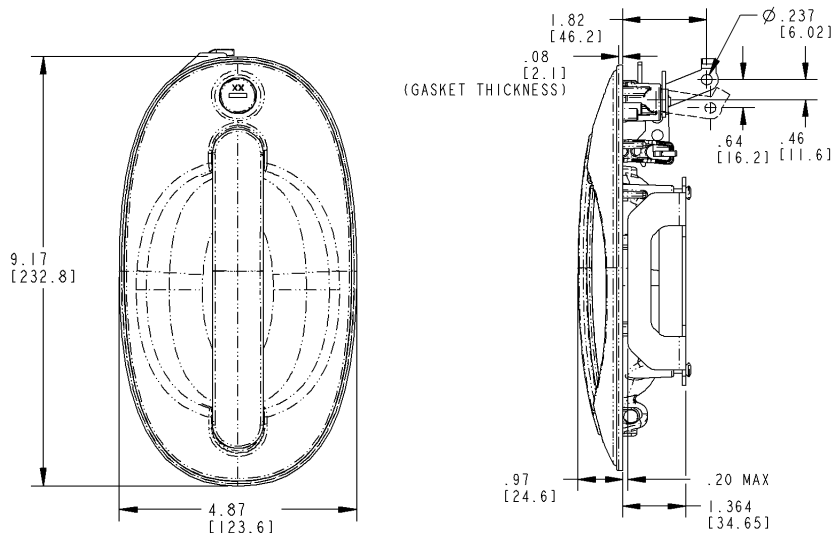

For more information visit  
[www.trimarkcorp.com](http://www.trimarkcorp.com)

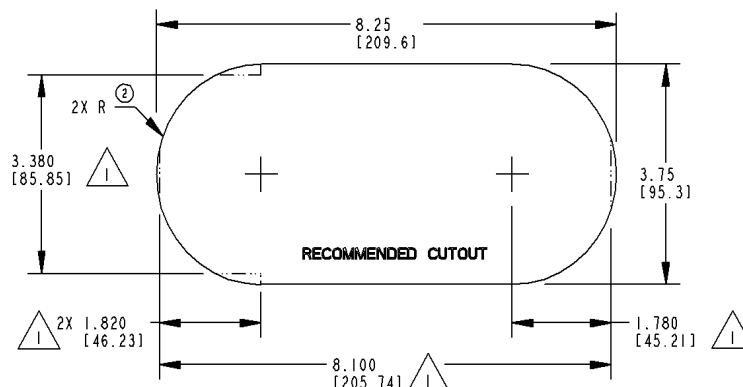

△ ALTERNATE CUTOUT OPTION.



# 020-1150 2-Point Free-Float Pull Handle

### FINISH:



- Black powder coated housing with black powder coated paddle or chrome plated paddle
- Optional chrome plated housing

**NOTE:** The 020-1150 is not available for sale to the ambulance market or any patient transport vehicle until further notice.


Individual part dimensions are for reference only. Refer to individual part drawings for complete dimensions, specifications, and installation procedures. Engineering assistance and application drawings are available.

Meets FMVSS 206 locking requirements and may be used in FMVSS 206 applications pending TriMark application approval.

**Design Patent No. D564,855**

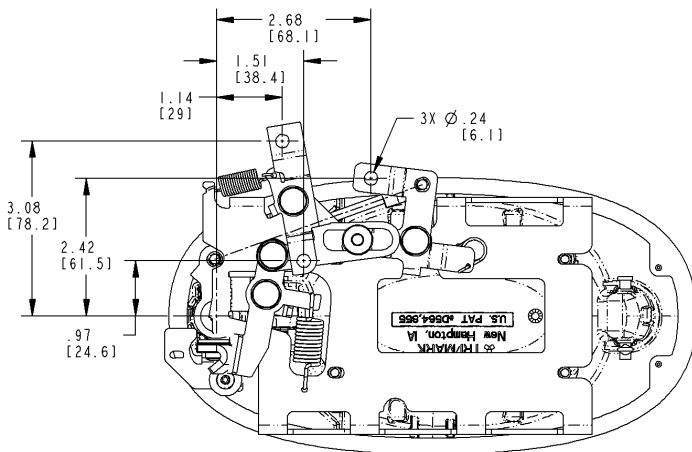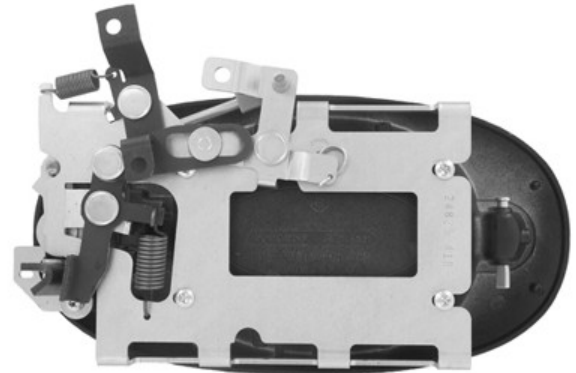

Horizontal Handle Mounting With Horizontal Rod Pull

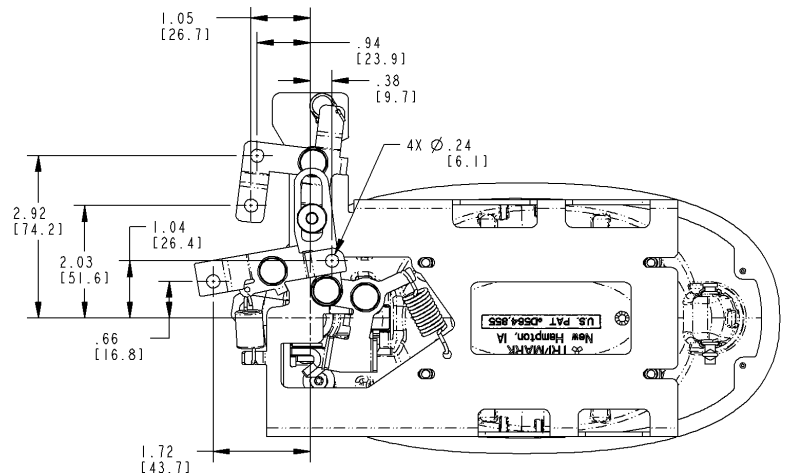

Horizontal Handle Mounting With Vertical Rod Pull

