

060-1625/060-1650 Motor Home Entrance Door Hardware



Designed for RV motor home and fifth wheel trailer entrance doors and is a redesign of our 060-0650 Motor Home Entrance Door Hardware. It features easy installation with through sandwich mounting, a low profile plunger style latch which is compliant to FMVSS 206, a built-in dead bolt for additional security and is power lockable.

- Motor home entrance doors with thickness ranging from 1.39" (35.3mm) to 1.78" (45.2mm)
- Different inside handle assemblies are required to facilitate the range of door thicknesses. Please identify when inquiring
- Fifth-wheel trailers, pull-type trailers, and slide-in campers
- Door requiring resistance to water and dirt infiltration
- Universal applications — either right or left-handed

FEATURES/BENEFITS:


- Inside release is low profile (.094") to allow for close fitting screen doors
- Paddle can be locked before door is shut
- Paddle is rigid when locked
- Automotive styling
- Comfortable finger access
- Inside assist with open bail for easy closing
- Can be keyed to match other TriMark door products with KeyOne™ Plus for a single-key system, keyed alike or provided non-locking
- Built-in deadbolt eliminates the need for add-on residential type deadbolt (deadbolt option)
- Deadbolt locks into the fully extended position for true deadbolt functioning (deadbolt option)
- Ability to be used with power actuation for locking
- Deadbolt cylinder non-removable when locked for added security
- Two different lengths of load pins available pre-assembled

AVAILABLE:

- With optional built-in deadbolt
- Master keyed paddle key cylinder
- Without key cylinders for matching entire vehicle cylinders after installation

MATERIAL:

- Housing, inside plates, handles, plunger bolt, deadbolt, locking components including lock knobs: Die cast zinc alloy
- Strike plate: Heat treated and zinc plated steel
- Load pins and plunger end plates: Steel

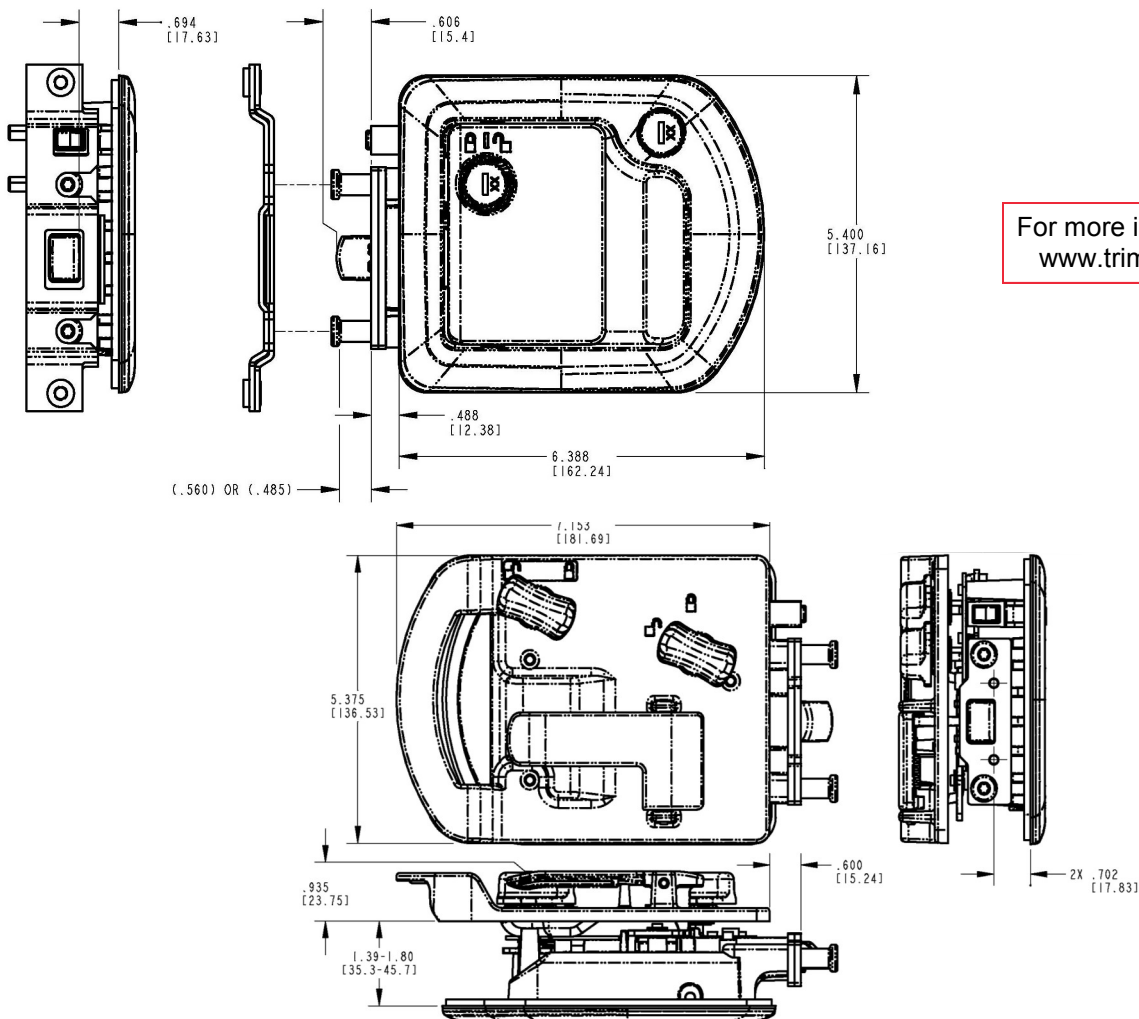

For more information visit
www.trimarkcorp.com

FINISH:

- Black powder coated
- Copper-nickel-chrome plated
- Other finishes available upon request


INSTALLATION:

- #10-24 UNC mounting screws not included. Recommended torque 10 in/lbs. (1.1 N-m)
- 1/4-20 UNC grade 5-type fasteners for strike plate installation recommended
- Supplied with gaskets already installed
- Sandwich mount installation does not require any linkage rods
- Power actuators, power actuation mounting brackets and rods are available for optional power actuation of locks. Please inquire.

Meets FMVSS2 206 load requirements and may be used in FMVSS 206 applications when used in accordance with TriMark's approved application.

Patents Pending

Individual part dimensions are for reference only. Refer to individual part drawings for complete dimensions, specifications, and installation procedures. Engineering assistance and application drawings are available.

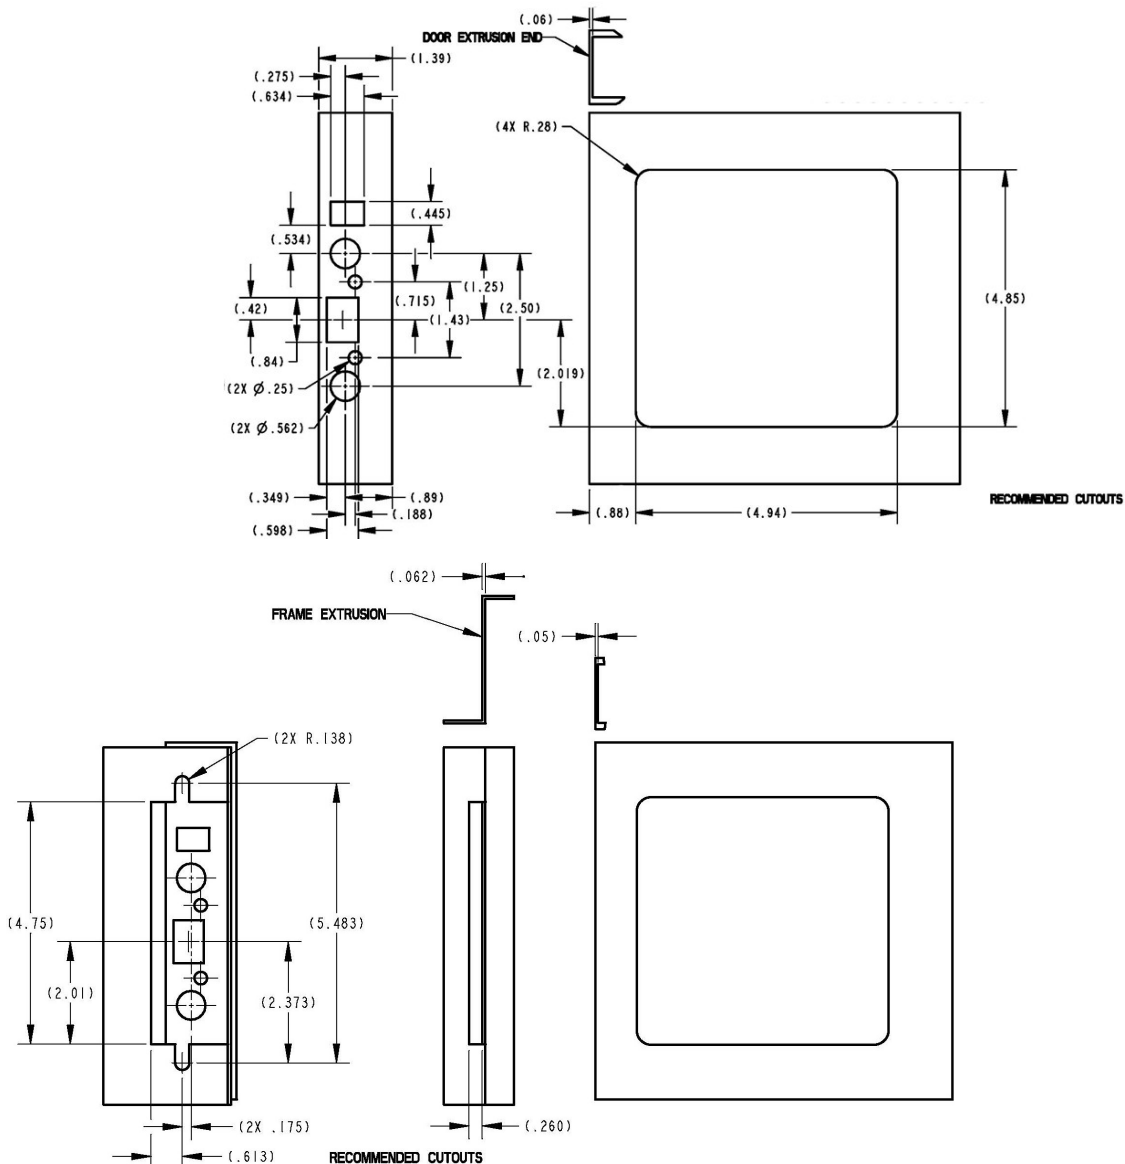



TriMark Corporation
 500 Bailey Avenue
 P.O. Box 350
 New Hampton, IA 50659
 United States
 Tel: +1 641 394 3188
 Fax: +1 641 394 2392
www.trimarkcorp.com

10002707 QM08 ISO 9001: 2008
 10002707 TS09 ISO/TS 16949: 2009
 TriMark Corporation

TriMark Europe Limited
 Cedar Court
 Walker Road
 Bardon Hill
 Coalville
 LE67 1TU
 United Kingdom
 Tel: +44 (0) 1530 512460
 Fax: +44 (0) 1530 512461
www.trimarkeu.com

427961 QM08 ISO 9001 : 2008
 427961 UM ISO 14001 : 2004
 TriMark Europe Ltd.