

050-5500

9mm Single Rotor Latch

9mm 单转轮门锁



This compact single rotor latch is designed for use on light to medium duty operator and compartment doors for off-highway applications. It features a direct catch to facilitate a remote exterior handle and has an integrated direct inside release that provides for ease of mounting and applications.

此款紧凑型单转轮门锁可用于公路或非公路车辆的轻中型驾驶室门及车厢门。配有一个直接锁扣，便于使用远程外把手，并且内部配有一个一体式直接解锁器，便于安装和使用。

DESIGNED FOR:

- Operator and compartment access door applications for off-highway vehicles
- Doors requiring latch location remote from actuating handle
- Light to medium duty doors up to 25 kg (55 lbs) with door seal pressures no greater than 20 kg (44 lbs)

设计用途:

- 用于非公路车辆的驾驶室门及车厢门
- 门内锁安装位置可由制动把手远程操控
- 轻中型门，载荷可达25kg（55lbs），门密封压力不大于20kg（44lbs）



www.trimarkcorp.com

TriMark Corporation
500 Bailey Avenue
P.O. Box 350
New Hampton, Iowa 50659
United States
Tel: 641-394-3188
Fax: 641-394-2392
1-800-447-0343
www.trimarkcorp.com

特利马克（徐州）汽车零部件有限公司
中国江苏省徐州经济开发区经五路标准
厂房 A5 221000
电话: +86 516 8773 0018
+86 516 8793 6120
传真: +86 516 8773 0058
邮箱: sales@trimarkcn.com
www.trimarkcn.com



特利马克（徐州）

扫描二维码，关注微信公众号 10/18-1

FEATURES/BENEFITS:

- Compact size and shape; allows maximum visibility and use of door space
- Black finish reduces the need for secondary painting or covers

特点/优点:

- 尺寸及形状紧凑; 可见度最大且可最大地使用门空间
- 黑色表面处理, 减少了二次喷漆或涂覆的需要



AVAILABLE:

- Right-hand version as shown
- Standard M6 x 1.0 threaded axles or 8.5mm (.335" diameter) "thru" axles

现有产品:

- 右手版, 如图所示
- 标准M6 x 1.0螺纹轴或 8.5mm (.335"直径) "贯通" 轴

MATERIAL:

- Rotor and catch: Heat treated steel
- Case halves: High strength steel
- Spring: Non-corrosive stainless steel
- Inside release knob: black plastic

材料:


- 转轮及窗钩: 热处理钢
- 拼合外壳: 高强度钢
- 弹簧: 抗蚀不锈钢
- 内侧释放旋钮: 黑色塑料

FINISH:

- Zinc plated steel components with black finish

表面处理:

- 镀锌并经黑色抛光组件

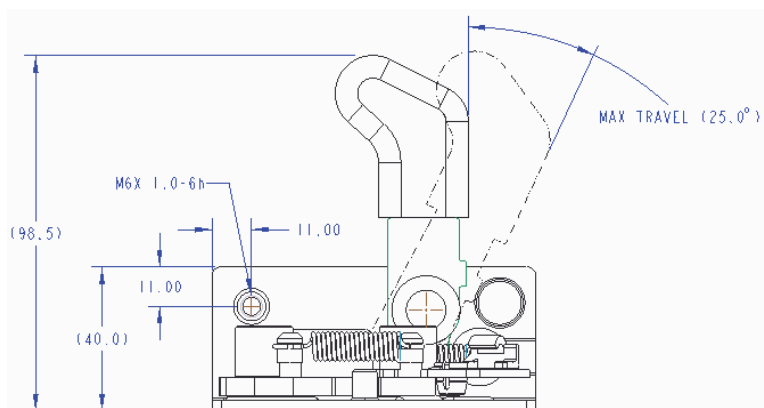


INSTALLATION:

- M6 x 1.0 threaded axle; provides ease of installation (Tighten to the fastener manufacturers' recommended torque value—however do not exceed 13.6 N-m (120 in-lbs))

安装:

- M6 x 1.0螺纹轴; 便于安装 (将紧固件拧紧至制造商推荐的扭矩值, 但是不得超过 13.6 N-m (120 in-lbs))

注意: 此门锁不满足FMVSS 206 (ECE R11) 规定的载荷要求。

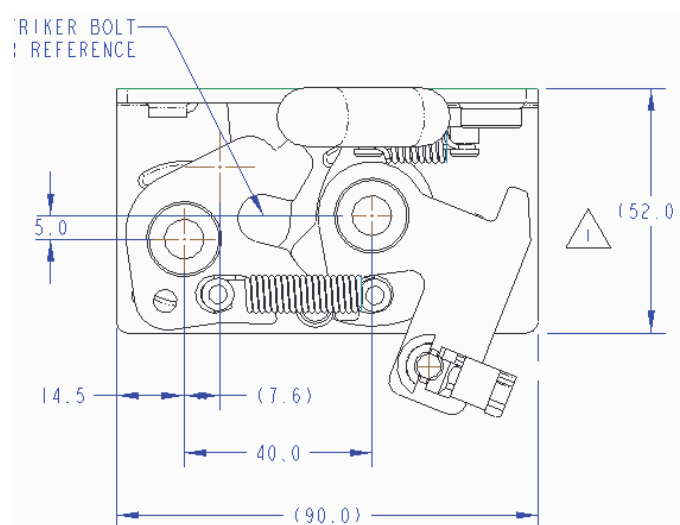

USE WITH:

- 030-5100 Remote Paddle Handle
- 与以下部件配套使用:
- 030-5100 遥控翻板把手

CAUTION: Latch does not meet the load requirements for FMVSS 206 (ECE R11).