

020-7100
Flush Pull Handle



Recessed pull handle designed for personal and compartment doors for light to medium duty in agricultural and construction applications.



www.trimarkcorp.com

TriMark Corporation
500 Bailey Avenue
P.O. Box 350
New Hampton, Iowa 50659
United States
Tel: 641-394-3188
Fax: 641-394-2392
1-800-447-0343
www.trimarkcorp.com

TriMark Europe
Cedar Court
Walker Road
Bardon Hill
Coalville LE67 1TU
United Kingdom
Tel: +44(0)1530 512460
Fax: +44(0)1530 512461
www.trimarkeu.com

TriMark (Xuzhou)
Building A5 Jinwu Road
Xuzhou Economic
Development Zone
Xuzhou, Jiangsu
221004 PR China
Tel: +86 516 8773 0018
Fax: +86 516 8773 0058
www.trimarkcn.com

FEATURES/BENEFITS:

- Ergonomic function and styling
- Variants for direct and remote release operations available in push and pull function (please inquire)
- Recessed profile with generous hand clearance
- 360° actuation movement to facilitate fitting in any orientation
- Supplied with mounting gasket
- Various key options available
- Handle free floats when locked

AVAILABLE:

- Several options are available for direct and remote release operation

MATERIAL/FINISH:



- Housing: UV stabilized nylon, brass mounting inserts
- Handle: UV stabilized nylon - gas injection

INSTALLATION:

- Easy to install
- (3) M5 brass insert mounting for stability
- Recommended mounting fastener torque to be 2.0 N-m (18 lbf-in) maximum

Individual part dimensions are for reference only. Refer to individual part dimensions for complete dimensions, specifications, and installation procedures. Engineering assistance and application drawings are available.

Caution: Product does not meet the locking requirements for FMVSS 206 (ECE R11).

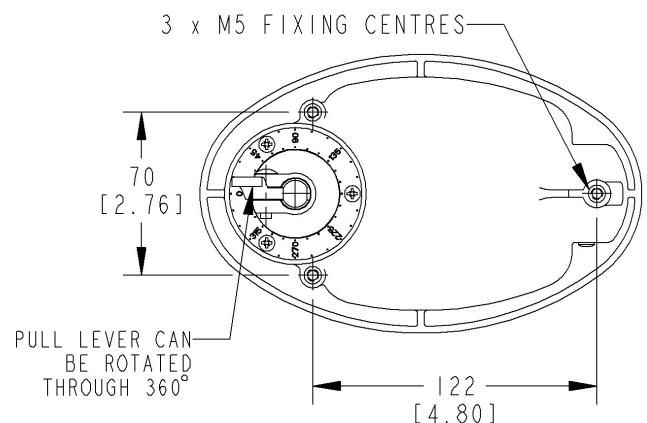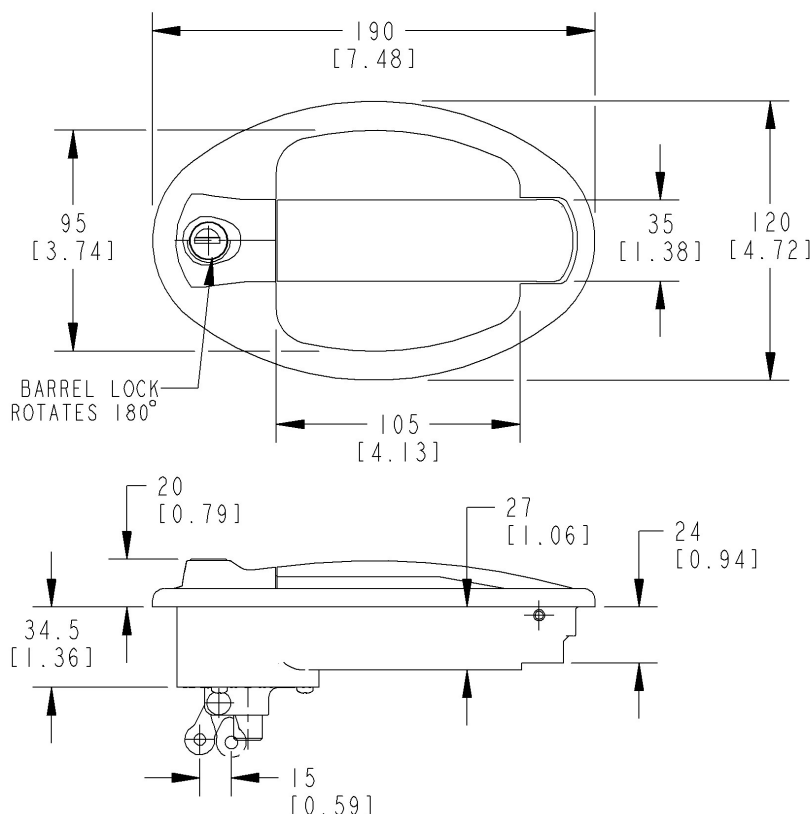

All dimensions are for reference only. For more information visit www.trimarkcorp.com