

# 060-0400 Flush Baggage Lock



### **DESIGNED FOR:**

- Recreational vehicles
- Single point assembly ideally suited to 1.437" and thicker foam core doors with door seal forces up to 20 lbs. (other applications possible)
- Two-point assembly can be used on virtually any thickness door with linkage release efforts up to 7 lbs. per linkage rod

### **FEATURES/BENEFITS:**

- Pivot arm and plunger bolt operating mechanism provides resistance to water and dirt penetration
- Modern automotive styling
- Shuttered key cylinder
- Paddle can be locked before door is shut
- Comfortable finger access

### **Global Locations:**

**TriMark Corporation**  
500 Bailey Avenue  
P.O. Box 350  
New Hampton, Iowa 50659  
United States  
Tel: 641-394-3188  
Fax: 641-394-2392  
1-800-447-0343  
www.trimarkcorp.com

**TriMark Europe**  
Cedar Court  
Walker road  
Bardon Hill  
Coalville LE67 1TU  
United Kingdom  
Tel: +44(0)1530 512460  
Fax: +44(0)1530 512461  
www.trimarkeu.com

**TriMark (Xuzhou)**  
Building A5 Jingwu Road  
Xuzhou Economic  
Development Zone  
Xuzhou, Jiangsu  
221004 PR China  
Tel: +86 516 8773 0018  
Fax: +86 516 8773 0058  
www.trimarkcn.com



TriMark. Interactive. Product. Selector



TriMark



TriMark Corporation

**USE WITH:**

- Please refer to our website for related products that are compatible for use with this product

**FINISH:**



- Black powder coated
- White powder coated

**MATERIAL:**

- Engineering plastic used for plunger bolt, pivot arm, and pivot plate has lower coefficient of friction than nylon, reducing closing and operating efforts

**AVAILABLE:**

- With or without plunger bolt for one or two point operation
- Locking or non-locking
- Keyed alike
- Wide variety of mounting bracket options available for various applications
- Linkage rods available for your specific applications
- KeyOne™ Plus

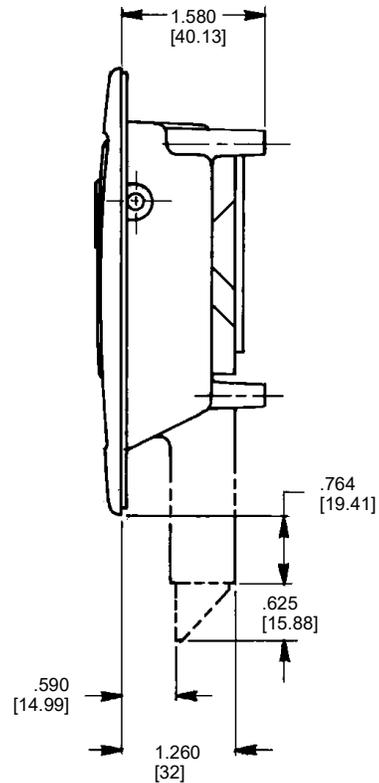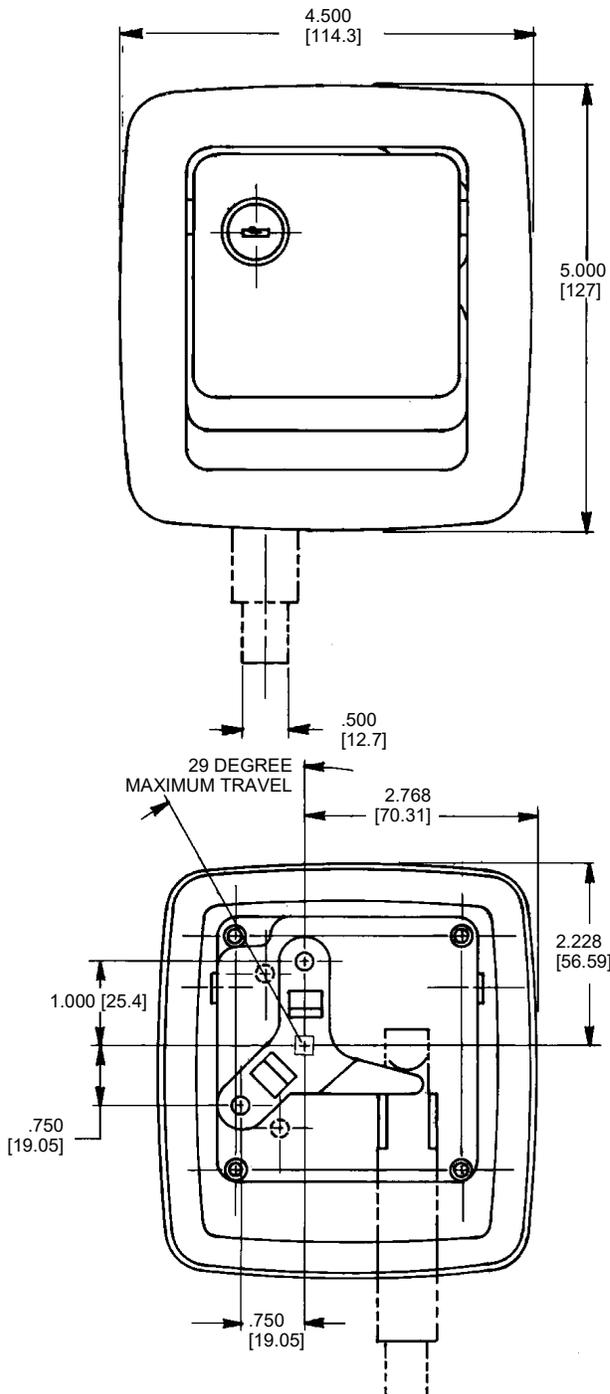

For more information visit  
[www.trimarkcorp.com](http://www.trimarkcorp.com)


### INSTALLATION:

- Easy drop-in installation with two-point version
- Supplied with gasket already applied under recess in housing flange for simple, clean installation
- Mounts with (4) #8-32 thread cutting screws (not supplied)


Individual part dimensions are for reference only. Refer to individual part drawings for complete dimensions, specifications, and installation procedures. Engineering assistance and application drawings are available.

**U.S. Patent No. 5,058,937**  
**Canadian Patent No. 2045830**  
**Design Patent No. D373,298**

The KeyOne™ system allows the operation of multiple onboard locking hardware with a single key. KeyOne™ Plus features include a reversible key for ease of operation and a larger body diameter for enhanced security. Please call for more information.

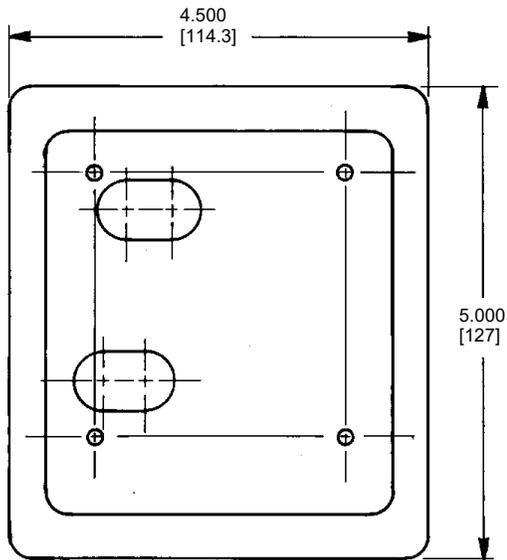

**STANDARD MOUNTING BRACKET**

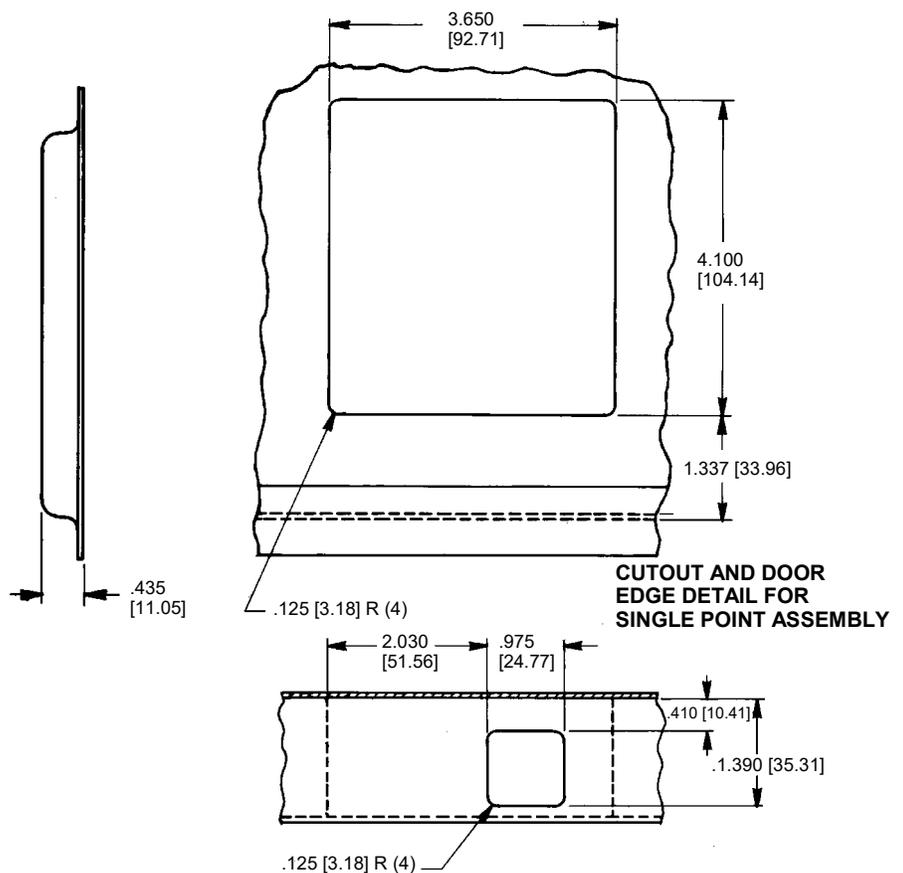

**CUTOUT AND DOOR  
EDGE DETAIL FOR  
SINGLE POINT ASSEMBLY**