

040-7200
Push Button Handle -
Flat Style



This push button handle is designed for off-highway vehicle applications that require a surface mounted exterior push button handle



TriMark. Interactive. Product. Selector

Global Locations:

TriMark Corporation
500 Bailey Avenue
P.O. Box 350
New Hampton, Iowa 50659
United States
Tel: 641-394-3188
Fax: 641-394-2392
1-800-447-0343
www.trimarkcorp.com

TriMark Europe
Cedar Court
Walker road
Bardon Hill
Coalville LE67 1TU
United Kingdom
Tel: +44(0)1530 512460
Fax: +44(0)1530 512461
www.trimarkeu.com

TriMark (Xuzhou)
Building A5 Jingwu Road
Xuzhou Economic
Development Zone
Xuzhou, Jiangsu
221004 PR China
Tel: +86 516 8773 0018
Fax: +86 516 8773 0058
www.trimarkcn.com



TriMark



TriMark Corporation

FEATURES/BENEFITS:

- (2 or 3) bolt 120mm (4.72") mounting
- Readily adaptable to a variety of door thickness using various cams
- Suitable for mounting to glass, steel and composite surfaces
- 12mm (.47") button travel
- Incorporates push button thumb shield
- Easy to operate

AVAILABLE:

- Can be keyed alike with most single and reversible key systems or non-locking configurations
- Free-float locking
- Variety of cam options

MATERIAL:

- Handle/Button: Glass reinforced nylon
- Brass threaded M6 inserts



INSTALLATION:

- Installed with (2 or 3) M6 x 1.0 bolts (not included)
- Mounts against glass with only two holes
- Available with mounting gaskets
- Recommended mounting fastener torque to be 6-8 N-m (50-59 lbf-in)

Individual part dimensions are for reference only. Refer to individual part drawings for complete dimensions, specifications, and installation procedures. Engineering assistance and application drawings are available.

Caution: Product does not meet the locking requirements for FMVSS 206 (ECE R11).

For more information visit
www.trimarkcorp.com

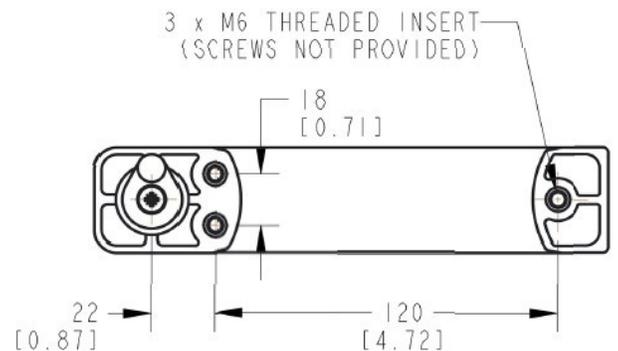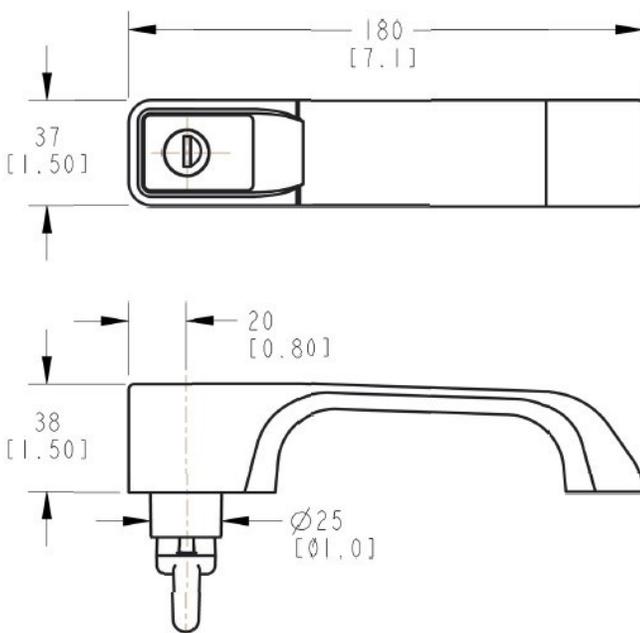

ALL DIMENSIONS ARE FOR
REFERENCE ONLY