

050-0200
Slimline Rotary Latch



This compact single rotor latch is designed for light to medium applications for on or off-highway entrance doors, compartments and access panels. It features a variety of trip levers and mounting axles for ease of mounting and application and is FMVSS 206 compliant.

DESIGNED FOR:

- Thinner, light or medium weight door applications
- Door weights up to 75 lbs. (34 kg)
- Door seal pressures of 20-25 lbs. (9-11kg) recommended for best results (not to exceed 50 lbs. [23 kg])
- Visible surface installation or concealed installation



TriMark Corporation
500 Bailey Avenue
P.O. Box 350
New Hampton, Iowa 50659
United States
Tel: 641-394-3188
Fax: 641-394-2392
1-800-447-0343
www.trimarkcorp.com

10002707 QM08  ISO 9001: 2008
10002707 TS09  ISO/TS 16949: 2009
TriMark Corporation

TriMark Europe
Cedar Court
Walker road
Bardon Hill
Coalville LE67 1TU
United Kingdom
Tel: +44(0)1530 512460
Fax: +44(0)1530 512461
www.trimarkeu.com

427961 QM  ISO 9001 : 2000
427961 UM  ISO 14001 : 2004
TriMark Europe Ltd.

AVAILABLE:

- Left or right hand configurations (left hand shown)
- With standard .265 diameter "thru" axles as shown or 1/4-20 UNC threaded axles (optional) or M6 x 1.0 threaded axles

MATERIAL:

- Internal latch components: heat treated, smooth edge stamped steel
- Springs: non-corrosive stainless steel
- Case halves: high strength steel

FINISH:

- Zinc plated, clear chromate steel components
- Stainless steel

Individual part dimensions are for reference only. Refer to individual part drawings for complete dimensions, specifications, and installation procedures. Engineering assistance and application drawings are available.

INSTALLATION:

- Three 1/4-20 UNC grade 5-type or M6 x 1 class 8.8 or better fasteners are recommended
- Vertical mounting with support ramp at top is required for proper alignment and subsequent engagement of locking pawl and striker bolt
- Tighten to the fastener manufacturers' recommended torque value, however, do not exceed 120 in-lbs. (13.3 N-m)
- Note: In order to pass the FMVSS 206 strength requirements for this latch family, latches that contain 1/4-20 UNC or M6 X 1.0 threaded axles must utilize fasteners that have sufficient length so that the end of the fastener passes completely through the entire axle and extend beyond the outside surface of the latch case

INTERNAL LUBRICATION:


- Oven-cured dry lubricant is applied on all critical moving parts

U.S. Patent No. 7,156,430



U.S. Patent No. 7,320,488

For more information visit
www.trimarkcorp.com

CAUTION: Applications of this latch may fall within the requirements of FMVSS 206 and SAE J839 safety standards. These safety related requirements are dependent on door application, e.g. front and rear hinged doors, sliding doors, or hinged upward swinging doors. The entire door hardware system must be included in the design/analysis process: latch, handle, lock mechanism, rods/linkages, fasteners, hinges, etc. This ensures compatibility of all components within the hardware system. If FMVSS 206 is a requirement, then all of the components within the door system must comply with strength, inertia and locking requirements as specified within the Standard. Note that this product complies with FMVSS 206 when tested with approved TriMark Striker Bolts in accordance with SAE J839 and that this product meets FMVSS 206 load requirements and may be used in FMVSS 206 applications pending TriMark application approval.

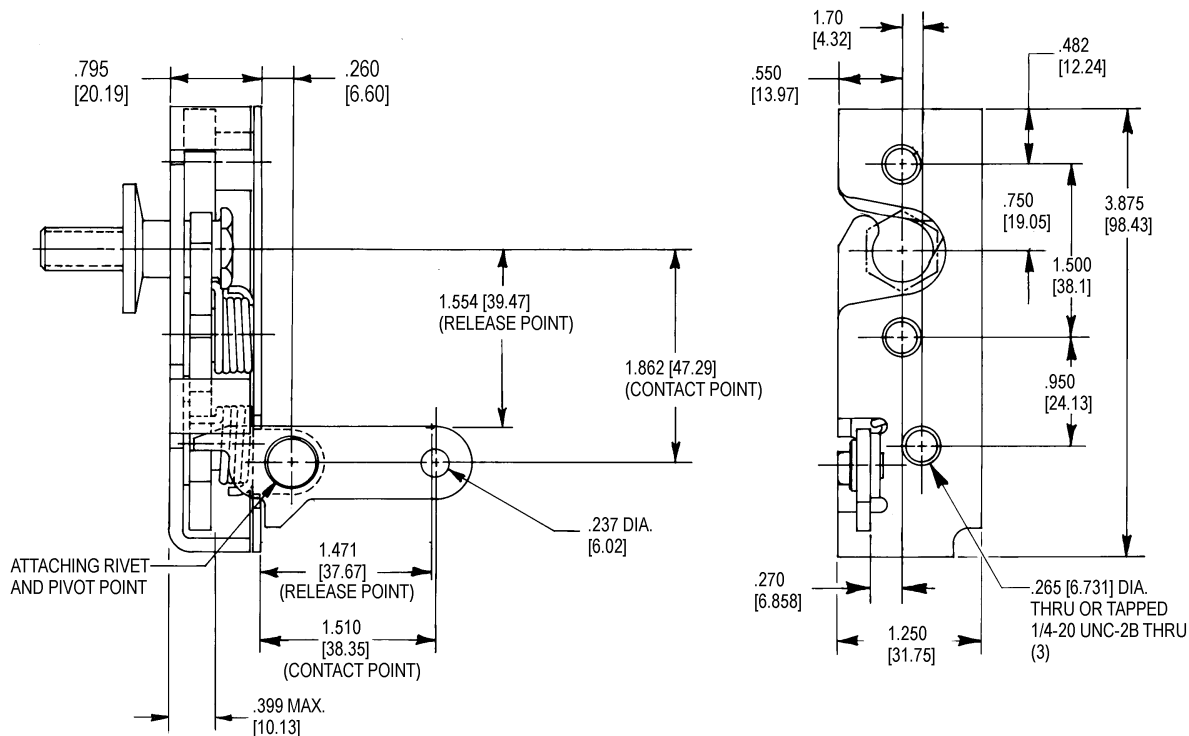

Optional Trip Levers (In Reference to Striker Bolt Centerline)

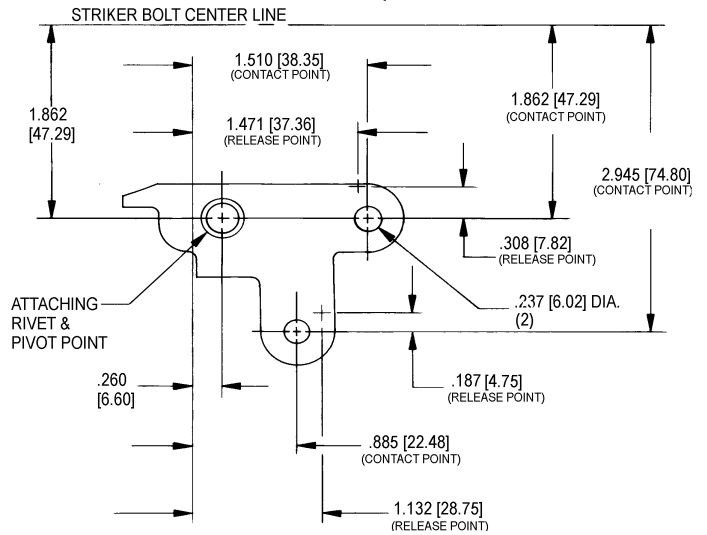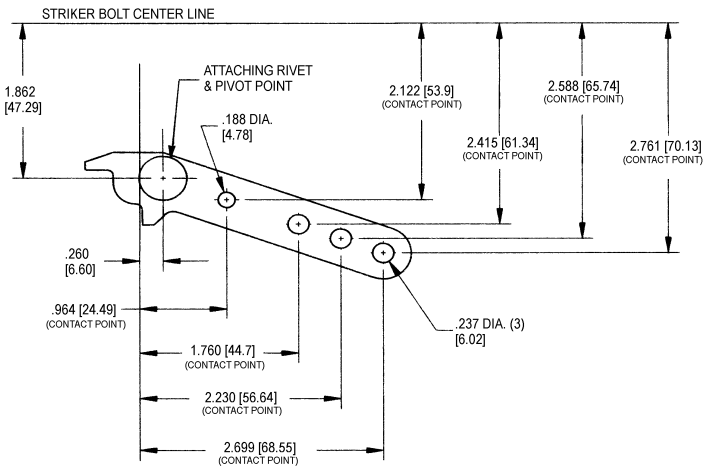

Optional Push-Button Release Configuration

