

030-0200
Paddle Handle

030-0250 With
Inside Release Lever



This flush paddle was designed for heavy-duty off-highway vehicle entrance doors and features robust construction and pivot plate versatility

DESIGNED FOR:

- Off-highway vehicle applications - construction, mining, agricultural, forestry
- Doors requiring latch location remote from activating handle
- Door thickness of 2.00" (50.8mm) or greater

Global Locations:

TriMark Corporation
500 Bailey Avenue
P.O. Box 350
New Hampton, Iowa 50659
United States
Tel: 641-394-3188
Fax: 641-394-2392
1-800-447-0343
www.trimarkcorp.com

TriMark Europe
Cedar Court
Walker road
Bardon Hill
Coalville LE67 1TU
United Kingdom
Tel: +44(0)1530 512460
Fax: +44(0)1530 512461
www.trimarkeu.com

TriMark (Xuzhou)
Building A5 Jingwu Road
Xuzhou Economic
Development Zone
Xuzhou, Jiangsu
221004 PR China
Tel: +86 516 8773 0018
Fax: +86 516 8773 0058
www.trimarkcn.com



TriMark. Interactive. Product. Selector



AVAILABLE:

- In right or left hand configurations (left hand shown)
- In locking or non-locking configurations

MATERIAL:

- Housing and paddle: die cast zinc alloy
- Pivot components: zinc plated, mild steel

FINISH:

- Housing and paddle: black powder coated
- Copper-nickel-chrome plated


INSTALLATION:

- (4) 10-24 UNC or M5 X .8 mounting screws (not included)
- See illustrated door cut-out detail (opposite page)



NOTE: Mounting bosses are tapped 3/8" deep

CAUTION: Product does not meet the locking requirements for FMVSS 206 (ECE R11).

Individual part dimensions are for reference only. Refer to individual part drawings for complete dimensions, specifications, and installation procedures. Engineering assistance and application drawings are available.

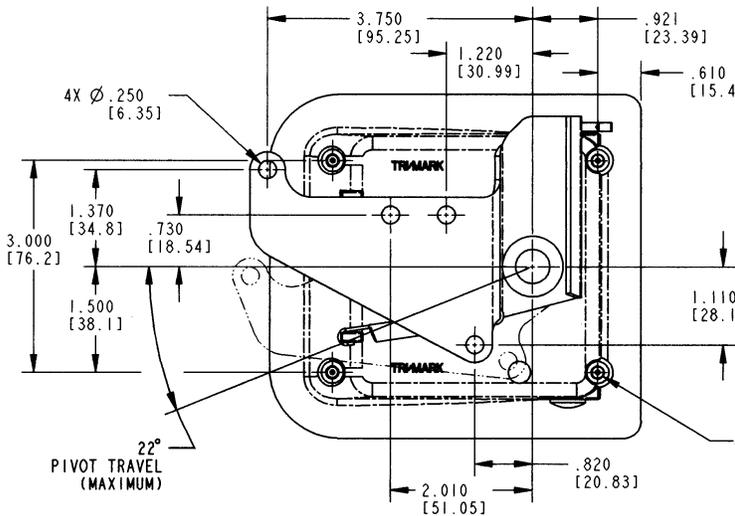

NOTE: PADDLE IS RIGID IN LOCKED POSITION

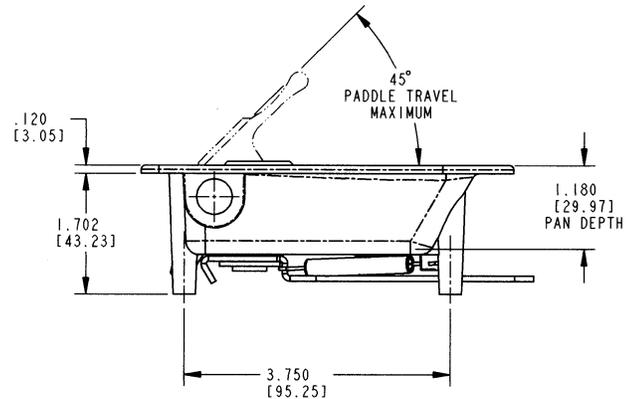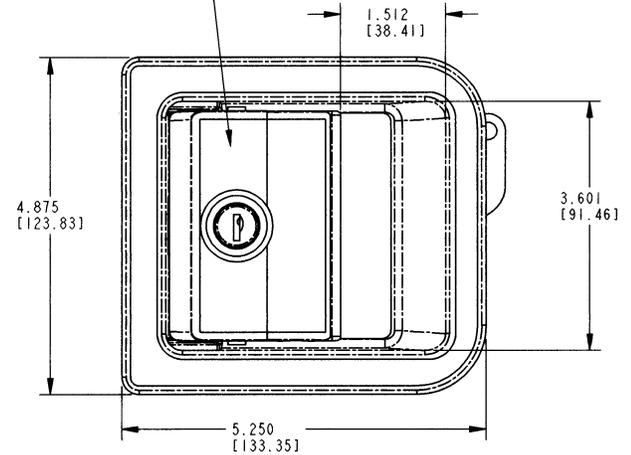

For more information visit
www.trimarkcorp.com

030-0250 Paddle Handle With Inside Release Lever

The 030-0250 Paddle Handle incorporates the basic material and concepts used in the 030-0200 Paddle Handle.

- Inside release lever eliminates much of the linkage typically required with conventional inside handles
- Operator can exit even if the door is locked from the outside
- Optional pivot plates available for your particular application
- Nylon paddle axle bushing and pivot plate thrust washers

