

060-0300

Flush Mount Security Lock



**TriMark**®



**DESIGNED FOR:**

- Door applications in travel trailers and motor homes with modern automotive styling

**FEATURES/BENEFITS:**

- Fits doors with thicknesses of 1-1/4" to 1-3/4" (see table)
- Can be mounted on either hollow or solid core door on travel trailers and motor homes
- Retrofittable with most face and edge bores now commonly used
- Fits either left or right hand doors
- 5 pin brass tumblers cylinder
- Shuttered automotive style keyway
- Two nickel-plated keys included

**Global Locations:**

**TriMark Corporation**  
500 Bailey Avenue  
P.O. Box 350  
New Hampton, Iowa 50659  
United States  
Tel: 641-394-3188  
Fax: 641-394-2392  
1-800-447-0343  
www.trimarkcorp.com

**TriMark Europe**  
Cedar Court  
Walker road  
Bardon Hill  
Coalville LE67 1TU  
United Kingdom  
Tel: +44(0)1530 512460  
Fax: +44(0)1530 512461  
www.trimarkeu.com

**TriMark (Xuzhou)**  
Building A5 Jingwu Road  
Xuzhou Economic  
Development Zone  
Xuzhou, Jiangsu  
221004 PR China  
Tel: +86 516 8773 0018  
Fax: +86 516 8773 0058  
www.trimarkcn.com



TriMark. Interactive. Product. Selector



TriMark



TriMark Corporation

### MATERIAL:

- Sturdy die cast zinc alloy

### FINISH:


- Black powder coated
- Additional colors and finished available -- please inquire

### AVAILABLE:


- 2-3/8" and 2-3/4" backsets standard (other backsets available)
- Strike available
- Up to 1,000 key codes

Individual part dimensions are for reference only. Refer to individual part drawings for complete dimensions, specifications, and installation procedures. Engineering assistance and application drawings are available.

For more information visit  
[www.trimarkcorp.com](http://www.trimarkcorp.com)

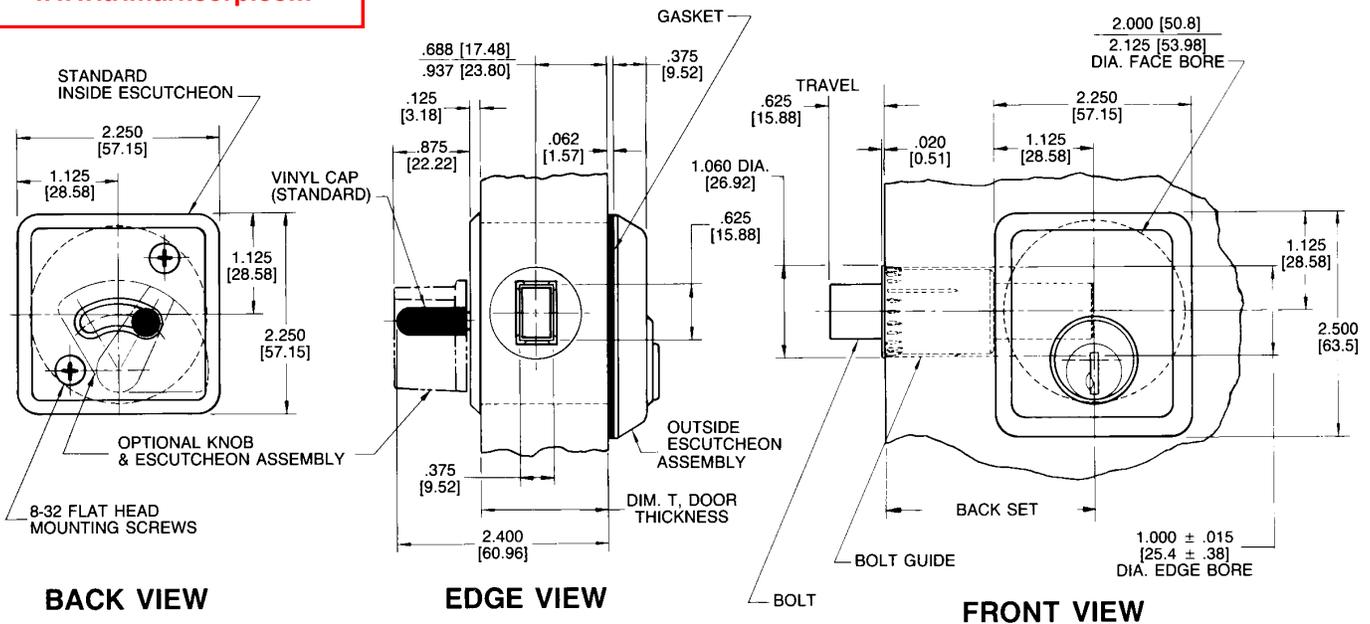

### STRIKE DETAIL

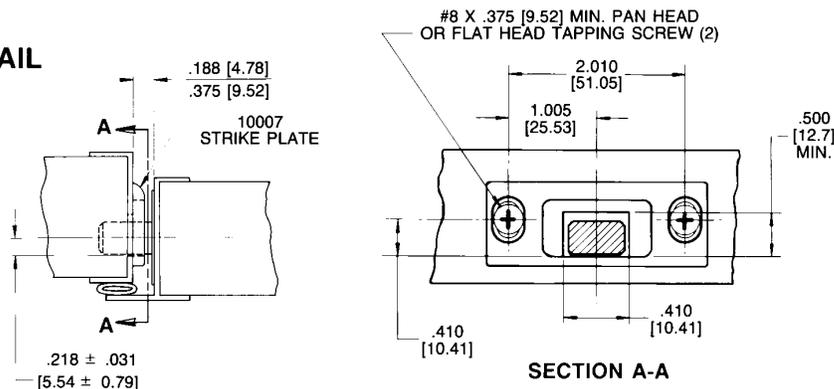

### SPECIFICATIONS

DIM. T. DOOR THICKNESS	1.250 [31.75]	N.A.	1.375 [34.92]	1.500 [38.1]	1.625 [41.28]	N.A.	1.750 [44.45]	
	1.375 [34.92]	**	1.500 [38.1]	1.625 [41.28]	1.750 [44.45]	***	1.937 [49.2]	
INSIDE ACTUATION	Standard Cap	Optional Knob	Standard Cap	Optional Knob	Standard Cap	Optional Knob	Standard Cap	
	Optional Knob	Standard Cap	Optional Knob	Standard Cap	Optional Knob	Standard Cap	Optional Knob	
MOUNTING SCREW LGTH.	1.125 [28.58]		1.250 (Std.) [31.75]		1.375 [34.92]		1.500 [38.1]	
							1.625 [41.28]	

(Metric dimensions are shown in brackets)

\*\*1.375 minimum door thickness with standard outside escutcheon assembly and optional inside knob

\*\*\*1.750 maximum door thickness with standard outside escutcheon assembly and standard inside vinyl cap

NOTE: This Security Lock does not comply with ANSI specifications and is not recommended for residential use.