
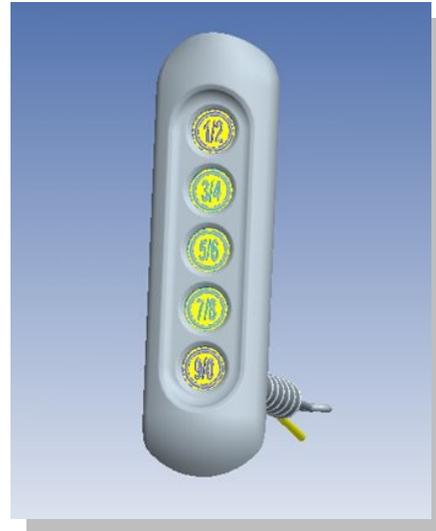


Discrete/CAN communication Configuration on Keypad

(22577-xx, 24295-xx, 24296-xx, 29087-xx)

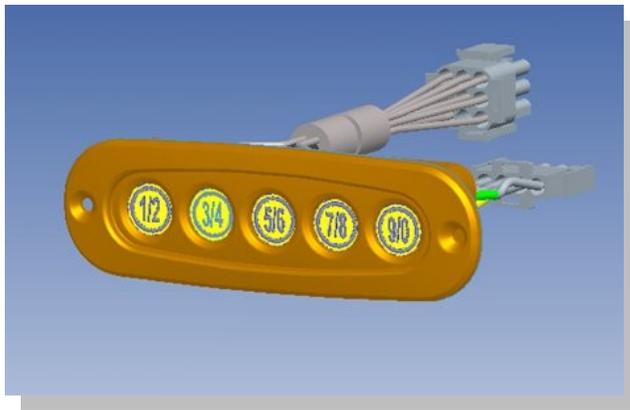

To **DISABLE** CAN Communications:

1. Disconnect power from the keypad.
2. Connect yellow wire of 9-pin connector (or loose yellow wire if no 9-pin connector is present) to GND (Black).
3. On 4-pin connector, connect WHITE wire to BLACK and GREEN wire to +12V (RED).
4. Provide POWER (Red) and GND (Black) to keypad.
5. Keypad will beep for five (5) seconds and then provide 5 short beeps.
6. Disconnect all wires from power and GND (yellow, red, black, white and green).
7. Reconnect harness and power up keypad normally.

To **ENABLE** CAN Communications:

1. Disconnect power from the keypad.
2. Connect yellow wire of 9-pin connector (or loose yellow wire if no 9-pin connector is present) to GND (Black).
3. On 4-pin connector: connect WHITE wire to +12V (RED) and GREEN wire to BLACK.
4. Provide POWER (Red) and GND (Black) to keypad.
5. Keypad will beep for five (5) seconds and then provide 2 short beeps.
6. Disconnect all wires from power and GND (yellow, red, black, white and green).
7. Reconnect harness and power up keypad normally.

**Discrete/CAN communication
Configuration on Keypad**
(22577-xx, 24295-xx, 24296-xx, 29087-xx)



TriMark Corporation
500 Bailey Avenue
P.O. Box 350
New Hampton, IA 50659
United States
Tel: +1 641 394 3188
Fax: +1 641 394 2392
E-mail: tips@trimarkcorp.com
www.trimarkcorp.com

TriMark Europe Limited
Cedar Court
Walker Road
Bardon Hill
Coalville, LE67 1TU
United Kingdom
Tel: +44 (0) 1530 512460
Fax: +44 (0) 1530 512461
E-mail: sales@trimarkeu.com
www.trimarkeu.com

TriMark (Xuzhou)
Automotive Components Co. Ltd
Standard Factory Building A5
Jingwu Road
Xuzhou Economic Development Zone
Xuzhou, Jiangsu, 221004 PR China
Tel: +86 516 8773 0018
Fax: +86 516 8773 0058
E-mail: sales@trimarkcn.com
www.trimarkcn.com